


## AIR NOZZLE SILVENT 9002W-S+-200

Item number: 90020169623, 90020269623

SILVENT 9002W-S+-200 - 9002W-S+-500: nozzle mounted on a bendable stainless steel FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/4" male connection thread. Otherwise, the same performance as 9002W-S+.

### Technical data

|                                      |               |
|--------------------------------------|---------------|
| Replace open pipe Ø (mm)             | 6             |
| Blowing force (N)                    | 7.5           |
| Air consumption (Nm <sup>3</sup> /h) | 37.5          |
| Sound level (dB(A))                  | 83            |
| Nozzle technology                    | Slot          |
| Material (nozzle)                    | 1.4404 (316L) |
| Connection                           | G 1/4"        |
| Connection type                      | Male          |
| Weight (kg)                          | 0.0000        |
| Max temp (°C)                        | 260           |
| Max op. pressure (MPa)               | 1.0           |

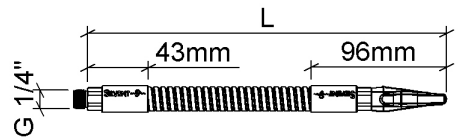

|                     |         |
|---------------------|---------|
| Silvent 9002W-S-200 | L=253mm |
| Silvent 9002W-S-300 | L=353mm |
| Silvent 9002W-S-400 | L=453mm |
| Silvent 9002W-S-500 | L=553mm |

### Benefits when replacing an open pipe

|                          |                         |     |
|--------------------------|-------------------------|-----|
| Replace open pipe Ø (mm) | 6                       |     |
| Noise reduction          | 19 [dB(A)]              | 73% |
| Energy savings           | 29 [Nm <sup>3</sup> /h] | 43% |

Material specification: EN 1.4301, PTFE, CU, EN 1.4404